SPECIALTY

CORRUGATED PLENUM

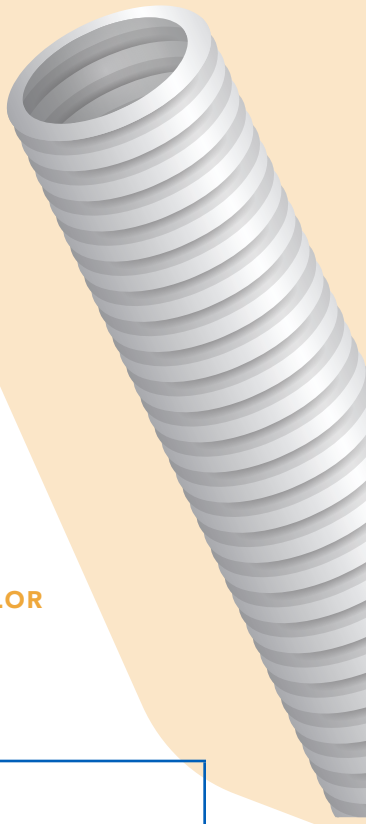

- Plenum listed to UL Standards 2024 (CSA FT-6), ideally suited for plenum applications
- Flexible, lightweight and easier to install than metal conduit
- Designed to protect existing cables and facilitate future cable installation or replacement
- When tested to UL2024/UL910 (CSA FT-6), Dura-Line's Corrugated Plenum is low-smoke producing and fire resistant as defined by the National Fire Protection Association when rating cables as suitable for use in ducts, plenum spaces

INSTALLATION TYPES
Interior

SIZE RANGE AVAILABLE
1"
1 1/4"
1 1/2"

STANDARD COLOR

FEATURES

STANDARD

MATERIAL Corrugated Plenum is made from fire retardant materials which are fully ETL approved for Plenum applications per UL-2024/UL-910

SPECIFICATIONS ETL LISTED to UL-2024/UL-910 & CSA FT-6

CONDUIT MARKINGS Permanent marking along conduit includes: material, relevant standards, production info, and sequential feet or meter markings. Custom options available.

OPTIONS

PREINSTALLED TAPE Factory pre-installed Bull-Line™ Pull Tape with EVEN-LOAD™ ensures extra slack at any access point throughout the reel. Available 500lb–6,000lb tensile strength or locatable.

CORRUGATED PLENUM TECHNICAL SPECIFICATIONS

SIZE	NOMINAL OD (IN)	OD TOLERANCE +/-	AVG ID	WEIGHT (LB/FT)
1"	1.385	0.020	1.165	0.125
1 1/4"	1.570	0.020	1.350	0.130
1 1/2"	1.824	0.020	1.600	0.149

Authorized Distributor CONNECT